Reach out if you need lollygagging assistance.







tips and videos





7866-047-778

We want you to love your Loll.

before beginning assembly. Locate the box marked "Tool Included"

LOLL TOOL





Insert bolts through countersunk hole side of blocks as shown below.

BLOCK & BOLT INSTALLATION

wrap we use is compostable.

 ** Please Recycle the BOX and paper packaging. The green plastic stretch can also be purchased from Loll for multi piece assembly jobs.

Sales Associate or Customer Service for support at 877.740.3387. A Pro Tool Kit information and visual aids. If you have more questions please contact your Loll hand. Watch the assembly videos at www.lolldesigns.com/videos for even more you can't muscle the bolt any tighter. It's virtually impossible to over tighten by Key, or the Loll Tool and tighten firmly until parts are drawn tight together and still allowing removal and reuse of the bolt. Start all bolts by hand, with the Allen standard with a thread coating to reduce bolts loosening after assembly while in inserts as you can easily overlighten and damage the product. All bolts come recommend using an electric drill with a cord and without a clutch to install bolts and know how to use it. Set the clutch setting at medium torque. We do not on the block or it can be removed. Use a Cordless Screw Gun if you have one protective film on it. This surface is hidden after assembly so the film can remain If your piece of furniture requires "Blocks" for assembly one side may have should reread the instructions to ensure you are aligning the proper components. it seems parts aren't fitting together you likely have something wrong and you was shipped in. Components should not be unnecessarily forced together! If soft surface like a blanket, carpet, or the flattened cardboard box the furniture To avoid damaging furniture perform the assembly of your Loll furniture on a clean

*Please read before beginning assembly! **ASSEMBLY TIPS**

material in case a return is necessary.

you will be contacted with a solution to the problem. It may be helpful to save all of your packaging Customer Service using our toll free number: 872.740.3387, ext. 1. The damage will be assessed and damaged furniture and the box it was shipped in, and email them to sales@lolldesigns.com or call it has not been damaged during shipping. If damage has occurred please take digital pictures of the Sometimes accidents occur. Please inspect your Loll furniture when you receive it to make sure that

DAMAGED PRODUCT





commercial orders the warranty is three years. not fail, under normal use, for five years from the year mark on the piece or the date of purchase. *For of good quality and workmanship, free from faults and defects. Loll warrants that all components will are not completely satisfied with your purchase. Loll Designs hereby guarantees that the piece will be We sit beside, on top, and beneath the quality of our fine furniture and will make things right if you Loll Designs strives to build long-term relationships based on confidence and trust with our customers.

YTNAARAW AY 3

everything you need for great results. Also see our cleaning video at lolldesigns.com/videos. from hard water can be removed with a solution of vinegar and water. Loll offers a cleaning kit that has favorite eco-friendly soap to the wash will get everything squeaky clean. Mineral deposits left over recommend a garden hose and incorporating a soft bristle brush. Adding a tablespoon or two of your we're pretty sure your Loll furniture will get a lot of use and will at some point need cleaning. We left outside all year regardless of the season. It will not rot, even it left standing in water. Nonetheless, Your new Loll furniture is a no maintenance product. You'll never need to paint or stain it and it can be

PRODUCT CARE

Loll Designs inspires people to appreciate the outdoors.


ASSEMBLY INSTRUCTIONS & PRODUCT INFO:

SALMELA - EMIN

7866.047.778

moo.engieebllol




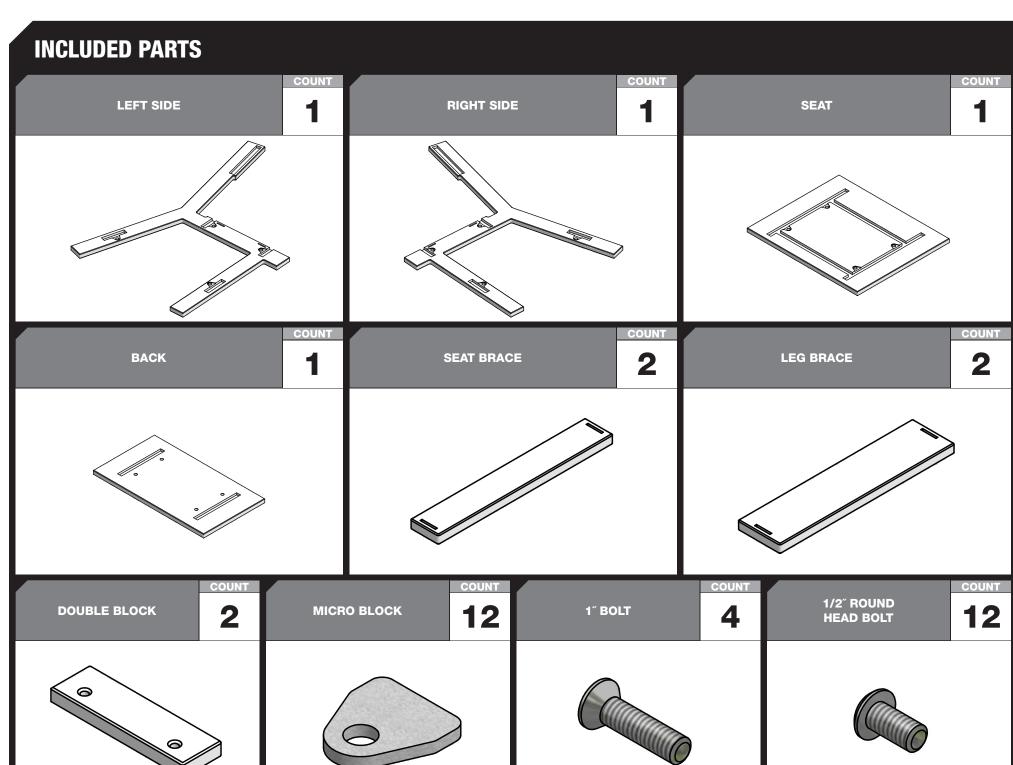


* It is very important that you finger tighten all bolts into inserts to ensure that you do not cross-thread bolts and inserts before tightening. It will also be easier if you wait to tighten bolts until you have all bolts installed and the piece completely assembled. This will allow for more movement of individual pieces and help in aligning holes with inserts. Use the Allen Tool provided to finish tighten bolt until snug.

ATTACH SEAT & LEG BRACE

ATTACH SECOND SEAT BRACE, LEG BRACE & SIDE

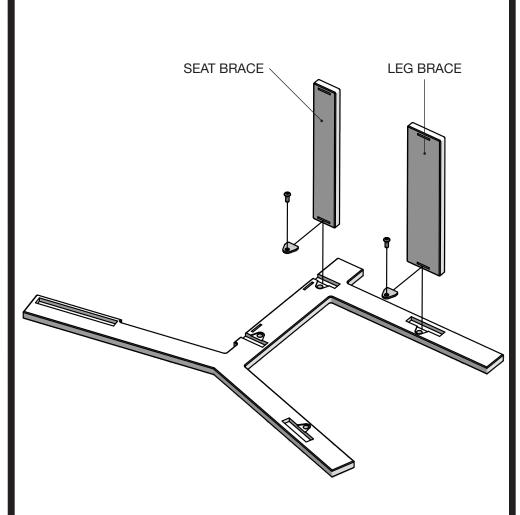

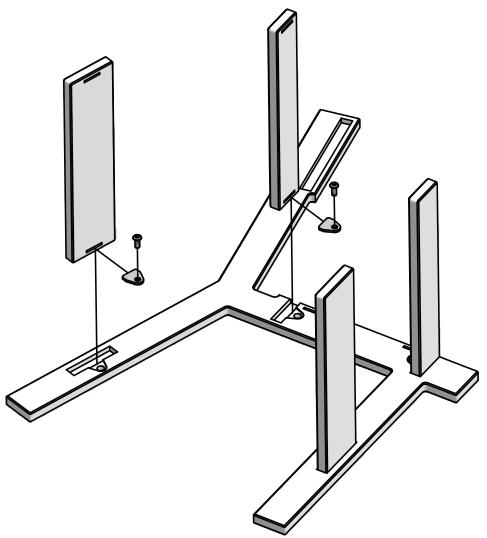

*Please read **Assembly Tips** before beginning assembly.

Lay Left Side down flat with cut outs and threaded holes facing up. Fit Seat Brace and Leg Brace into the Sides cut outs as shown. Place Micro Blocks into the Seat Brace and Leg Brace pocket cut outs, insert $1/2^{\circ}$ Round Head Bolts through the blocks into the Sides threaded holes, and finger tighten.


Fit second Seat and Leg Brace into the Sides cut outs as shown. Place Micro Blocks into the Seat and Leg Brace pocket cut outs, insert 1/2" Round Head Bolts through the blocks into the Sides threaded holes, and finger tighten.


Attach Right Side using step 1-2.

2

ATTACH SEAT

4 ATTACH BACK

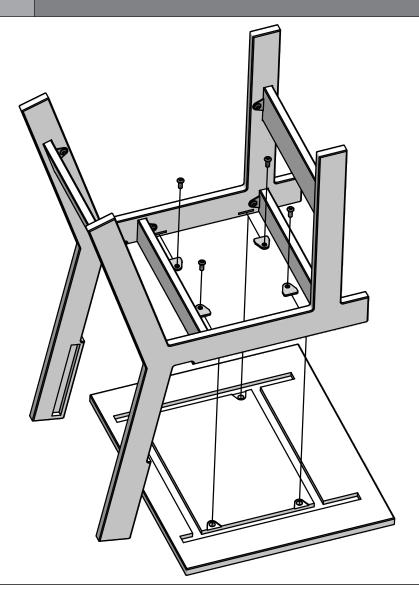

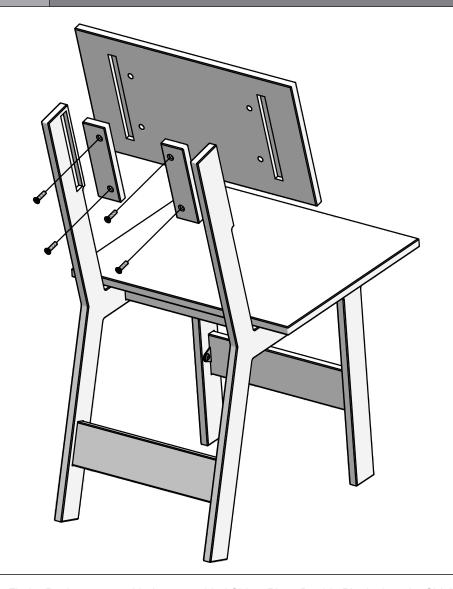

Fit the Seat cut outs with the assembled Sides and Seat Braces. Place Micro Blocks into the Seat Brace pocket cut outs, insert 1/2" Round Head Bolts through the blocks into the Seats threaded holes, and finger tighten.

Fit the Back cut outs with the assembled Sides. Place Double Blocks into the Side's pocket cut outs (recessed hole side out), insert 1" Bolts (white) through the blocks into the Seats threaded holes, and finger tighten.

*Complete assembly by securely tightening all bolts using provided wrench.